

# NASA TECH BRIEF

## Langley Research Center




NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

### Strong, Easy-to-Mold, Spiral Buttress Thread

#### The problem:

Connect two molded plastic cylinders without changing wall thickness or sacrificing longitudinal

strength at the juncture. When a straight thread is used to connect two cylinders, a deep shoulder is required to accommodate each thread (male and female). The longitudinal strength of the cylinder wall is decreased accordingly by the depth of this shoulder. Normally, the cylinder wall is thickened to compensate. With the spiral buttress thread, no shoulder is required, and the longitudinal strength is decreased only by the depth of one thread, obviating the necessity for compromise in the wall thickness.

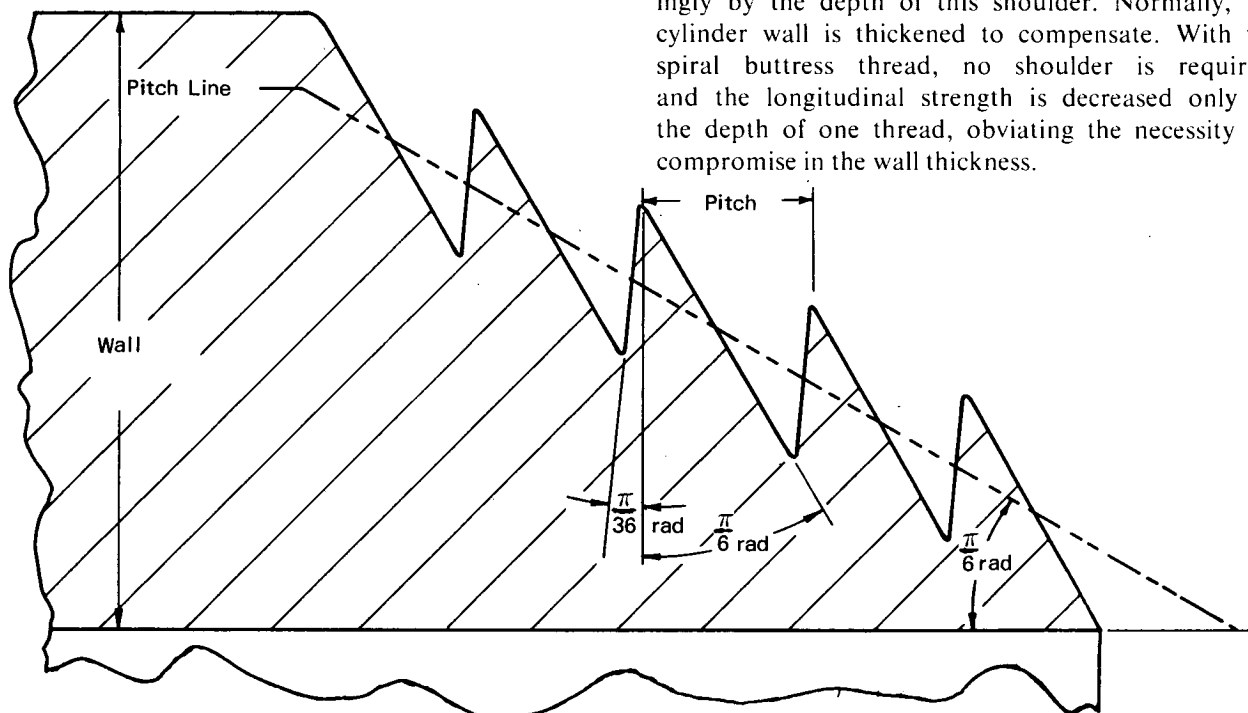

strength at the juncture. The solution must lend itself to conventional molding techniques.

#### The solution:

Use a buttress thread with a steep taper.

#### How it's done:

A spiral buttress thread solves many of the problems associated with the conventional straight thread.

The spiral buttress configuration improves moldability and consequently the quality of molded threads. When compared to a conventional thread of constant pitch diameter, the spiral buttress form presents a cavity profile that remains more open to the influx of plasticized compound and therefore promotes a more rapid, complete and uniform thread fillout.

Other advantages of the spiral buttress thread are:

(continued overleaf)

it is easier to start; it is fully engaged in less than one rotation, regardless of its length or diameter; it is score resistant and essentially jam proof; and it is very easy to disengage from its mold form, thereby simplifying part ejection.

**Note:**

Requests for further information may be directed to:

Technology Utilization Officer  
Langley Research Center  
Hampton, Virginia 23365  
Reference: TSP71-10336

**Patent status:**

Inquiries about obtaining rights for the commercial use of this invention may be made to:

Patent Counsel  
Mail Code 173  
Langley Research Center  
Langley Station  
Hampton, Virginia 23365

Source: W. C. Heier  
Langley Research Center  
(LAR-10755)